


5100 SERIES

HYDRAULIC HOSE

HI TEMP HOSE

Black Textile Braid

1-Wire Braid Hose

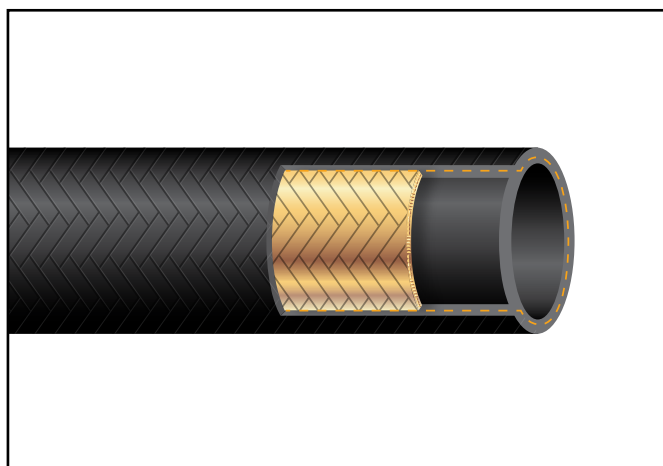

APPLICATIONS: Used for high temperature oil/multi-fluid/air.

CONSTRUCTION:	Tube: CSM - High temperature oil resistant rubber
	Cover: Oil and weather resistant rubber impregnated black synthetic braid
	Reinforcement: One wire braid of high tensile steel

TEMPERATURE RANGE: -40°F (-40°C) to 300°F (150°C)


BRANDING: 5100 HI TEMP HOSE (-XX) X/X" X.X mm - 70 BAR/1015 PSI MAX WP XQXX MADE IN USA

COUPLINGS: 12/JB12 Series

Part Number	Inside Diameter		Outside Diameter		Reinforcement	MAX Working Pressure		Vacuum	Weight		Minimum Bend Radius		Std. Length
	Inch	mm	Inch	mm		PSI	BAR		lb/ft	KG/m	inch	mm	
5100-04	1/4	6.4	0.52	13.2	1 Braid	1015	70	n/a	0.12	0.18	2.0	51.0	300 ft
5100-06	3/8	9.5	0.66	16.8	1 Braid	1015	70	n/a	0.17	0.25	2.5	63.5	250 ft
5100-08	1/2	12.7	0.80	20.3	1 Braid	1015	70	n/a	0.20	0.3	3.5	88.9	200 ft
5100-10	5/8	15.9	0.93	23.6	1 Braid	1015	70	n/a	0.26	0.39	4.0	101.6	200 ft
5100-12	3/4	19.1	1.15	29.2	1 Braid	1015	70	n/a	0.36	0.54	4.7	119.4	150 ft
5100-16	1	25.4	1.37	34.8	1 Braid	1015	70	n/a	0.45	0.67	6.0	152.4	150 ft

Contact Customer Service for availability.

We disclaim any liability for use of our products in applications other than which they are designed.

 **WARNING:** This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov